



Extractores de baño – serie FUTURE
Bathroom extract fan – FUTURE series



Soler&Palau  Ventilation Group

FUTURE-100



Ventiladores helicoidales extraplanos, con caudal máximo de 95 m³/h para conectar a conductos circulares de 100 mm. Fabricados en plásticos inyectados, luz piloto de funcionamiento, motor 220-240V-50Hz, clase B, IPX4, Clase II, con protector térmico, para trabajar a temperaturas de hasta 40°C.

Versiones

- C - Con compuerta antirretorno*
- Z - Con rodamientos de bolas*
- T - Con temporizador*
- H - Con sonda de húmeda*

Axial extractor with air flow rates of 95 m³/h, for connection to 100 mm diameter circular ducting. The FUTURE-100 is manufactured from injection moulded plastic, fitted with neon light indicator and single phase 220-240V-50Hz, class B motor equipped with overload thermal protection. FUTURE-100 is class II insulation, IPX4 rated and suitable to operate with air temperature up to 40°C.


Versions

- C - With back draft shutter*
- Z - With ball bearings*
- T - With timer*
- H - With humidity sensor*



Compuerta antirretorno (versiones C)
Evita la entrada de aire del exterior y las fugas de calefacción, cuando el extractor no está en funcionamiento. Se abre por la presión del aire.

Back draft shutter (C versions)
To prevent air entry and limit heat leakage when the extractor is not operating. It opens due to the pressure of the air.




Reja frontal extraplana
Slimline front grille

características técnicas / technical characteristics


Modelo Model	Velocidad Speed (r.p.m.)	Potencia absorbida máx. Max. absorbed power (W)	Tensión Voltage (V) 50 Hz	Nivel de presión sonora Sound pressure level (dB(A))*	Caudal máximo Maximum air ow (m ³ /h)	IP	Diámetro Ø duct (mm)	Peso Weight (kg)
FUTURE-100	2500	13	230	40	95	Class II / IPX4	100	0,44

* Nivel de presión sonora, medida en campo libre a 1,5 m. / Sound pressure level measured at 1,5 m at free air conditions

dimensiones (mm) / dimensions (mm)

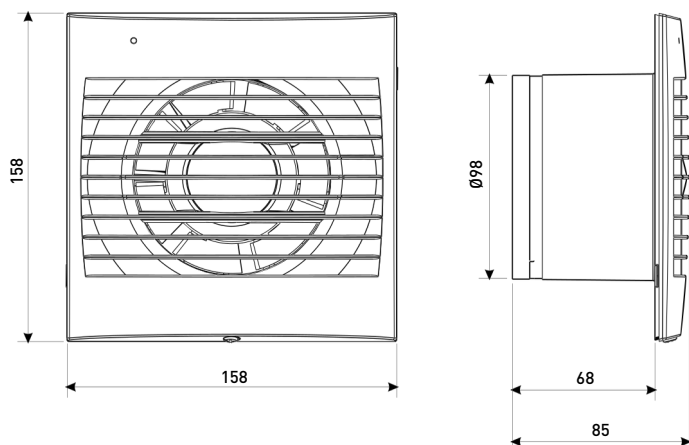

curva característica / performance curve

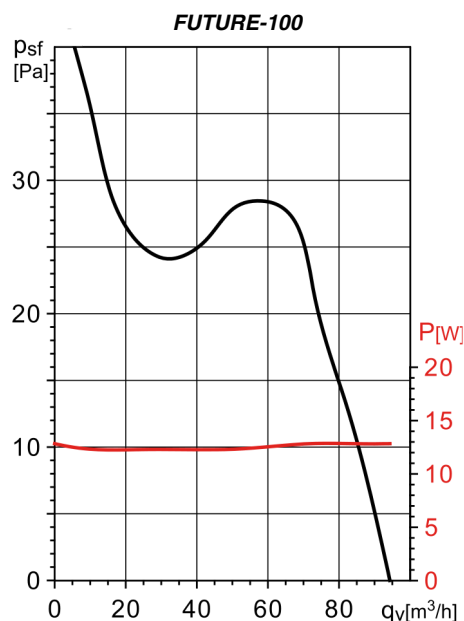

accesorios / accessories



GSA-100
Conducto exible
de aluminio.
*Flexible aluminium
ducting.*



GRA-75
Reja
de
exterior
aluminio.
*Aluminium
exterior grille.*




**TUBO
TELESCÓPICO Y
PERSIANA FIJA
(200 a 420 mm)
FIXED SHUTTER
AND
TELESCOPIC
DUCT (200 to 420
mm)**



CX-80/125
Brida de sujeción.
*Worm drive ducting
clip.*



PER-100W
Persiana de
sobrepresión.
Back draft shutter.



WINDOW KIT 100
Elemento para instalar
el extractor en cristal.
*Accessory to allow
FUTURE-100 in a
window.*